
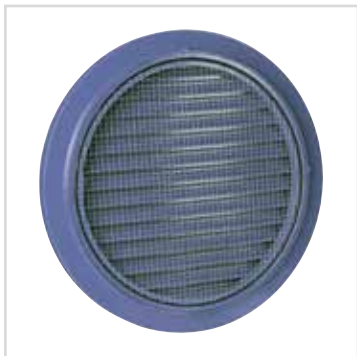


415R

Round louvre with chevron section blades

GLAZED-IN
LOUVRE

ALUMINIUM

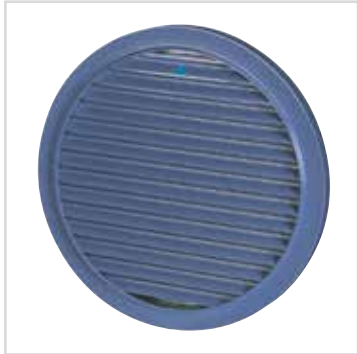

MATERIAL

- Made from aluminium sections: AlMgSi 0.5 (according to EN 12020-2)
- Stainless steel 304 mesh [6 x 6 mm]
- Finishing: anodized in satin colour [20 micron] or powder-coated in any RAL or Syntha Pulvin colour [40 micron]
- Frame assembled by a single weld

DIMENSIONS

- Blade pitch: 20 mm
- Frame thickness: 24 mm
- Minimum diameter: 340 mm
- Maximum diameter:
 - 1400 mm if anodised in satin colour
 - 1500 mm if powder-coated in RAL or Syntha Pulvin colour
 - Over 1500 mm: in two parts

FIXING

- To be fitted like double glazing

OPTIONS

- Stainless steel 304 mesh [2,3x2,3/10x10/20x20 mm] or without
- Insect screen or mesh in stainless steel 316



TECHNICAL SPECIFICATIONS

All properties are valid for the standard version of the Louvre, unless otherwise stated.

Airflow		[EN 13030]
K-factor [entry]		34.60
K-factor [discharge]		34.60
C _e coefficient		0.170
C _d coefficient		0.170
Technical data		
Visual free area		93%
Physical free area		39%
IP class		IP2XD

TECHNICAL DRAWINGS

